





Protected and compact waterproof ceiling or wall lamp, entirely made of polycarbonate. It is characterized by high mechanical resistance to shocks and high degree of impact of electrical safety with double possibility of entry for feeding, in the lower or lateral part of the ceiling light.

Application	Indoor / Outdoor	IP degree	IP44
Mechanical resistance	IK10	Insulation class	II
Glow Wire Test	850 °C	Weight (kg)	0.3
Colour	Grey RAL 7035	Lamp holder	E27
Efficiency class of compatible lamps	D ÷ A+	Max lamp power	60 W
Electrocod	2415		

DIMENSIONAL

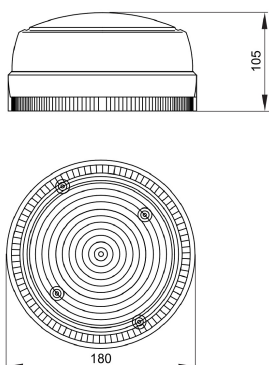

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY



IP
IP44

IK
IK10



GWT
850 °C

STANDARDS/APPROVALS

